

VIDET TSR

TECH DATA SHEET

Powdered Absorbent System for Producing Oil Stain Removers, Coating Removers, Sweeping Compounds and Metal Polishes

- ▲ Exceptional Oil and Grease Lifting From Porous Substrates
 - Effective On Oils, BBQ Grill Stains, Silicone Oils (Tire Dressings)
- ▲ Ease of Use
 - Simply Pour On Stain, Let Dry and Sweep Away
- ▲ Formulations Safe On Many Substrates (Asphalt, Concrete, Paving Stones, Pressure Treated Wood, Composite Decking, Etc.)
- ▲ Produce VOC Free Formulations
- ▲ Formulate Without Solvents
- ▲ Surfactant System Is Readily Biodegradable

APPLICATIONS

Oil Stain Remover for Concrete, Asphalt, Wood Decking, Composite Decking
Coating Removers
Cream Cleansers
Sweeping Compounds
Metal Polish



FORMULARY

CREAM CLEANSER

Ingredient	% by Weight
Water	QS
Kelzan ASX-T	0.3
EDTA 50%	1.0
Videt TSR	5.0
Minex 2*	20.0

*Minex 2 available from Unimin Canada Ltd.

SOLVENT FREE METAL POLISH

Ingredient	% by Weight
Water	74.4
Videt NLS-90	1.0
Vanzan NF-ED or NF*	0.6
Videt TSR	5.0
788 Alumina Polishing P730**	19.0

- ▲ Combine water and Videt NLS-90. Mix until Videt NLS-90 is fully solubilized.
- ▲ Add the NF-ED/NF. Mix until fully thickened/hydrated. Thickener level can be adjusted based on viscosity desired.
- ▲ Add Videt TSR and mix until homogenous.
- ▲ Add the 788 Alumina Polishing P730 and mix until homogenous.

This formulation is also effective as a marble polish, wheel polish and will remove silicates from glass.


Note: Alumina Polishing P730 is a very dusty material and proper handling is required.

* Vanzan thickener is available from RT Vanderbilt, www.rtvanderbilt.com

** 788 Polishing 730 is from MPSI (Mineral and Pigment Solutions, Inc.) For contact information on MPSI go to www.mp-solutionsinc.com

PERFORMANCE DATA

OIL STAIN REMOVER USING A FULLY FORMULATED TSR PRODUCT

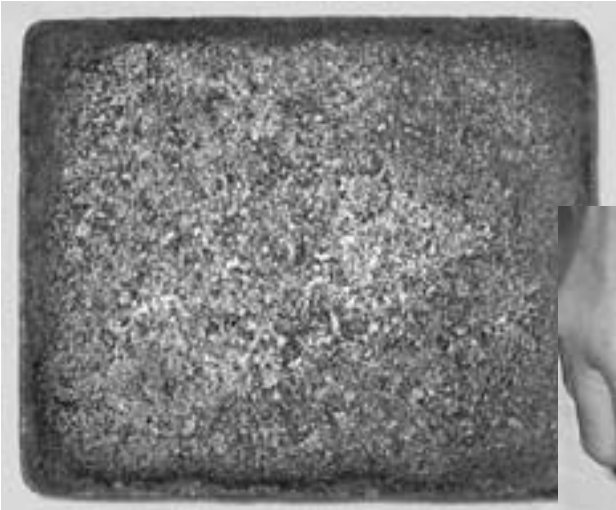


Oil Stained Pavement Stone



1. Pour on TSR formulated product.



2. Let dry.

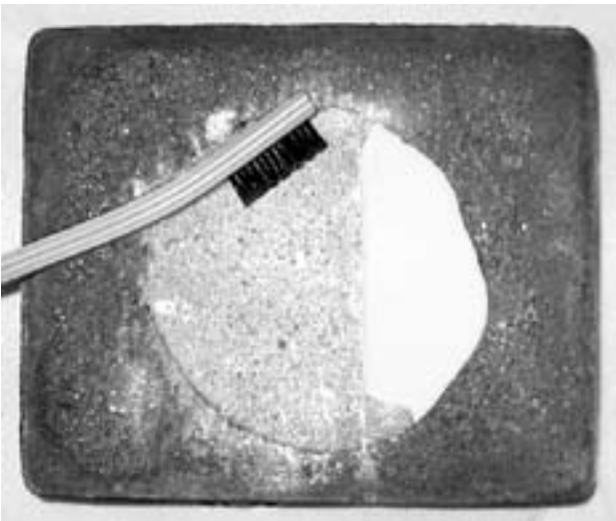

3. Brush away.

SPECIFICATIONS & PROPERTIES

Appearance	white, free flowing powder
Bulk Density	12.5 – 18.7 lbs/cubic foot
Activity, %	97

PACKAGE & HANDLING

⚠ **Videt TSR** is available in 77 lb. fiber drum (Net Wt. lbs)
and 11 lb. pails (Net Wt. lbs).

⚠ DOT Classification: **Non-Regulated**.



Vitech International Inc.
U.S.A. 1-800-796-1896

www.vitechinternational.com

THE TECHNICAL SOURCE FOR INNOVATIVE SOLUTIONS

The descriptions, data, information and/or statements contained herein are based upon our research and/or of others and are believed to be accurate. No guarantee of their accuracy is made however, and unless expressly stated in a written contract, the product(s) discussed herein are sold without conditions or warranties expressed or implied. Readers are advised to make their own tests to determine the suitability of any products or formulations described herein for their particular purposes. Nothing contained herein shall be construed as a recommendation to use or as a license to operate or to infringe on any existing patent. In no case shall the descriptions, data, information and/or statements contained herein be considered a part of our terms and conditions of sale. Further, the reader acknowledges that the descriptions, data, information and/or statements furnished by Vitech International Inc. herein are given gratis and Vitech International Inc. assumes no obligation and will not be liable for any losses, injuries or consequential damages, direct or indirect, which may result from the use of or reliance on any information contained herein, or results obtained therefrom, as such is being given and accepted at your risk.